
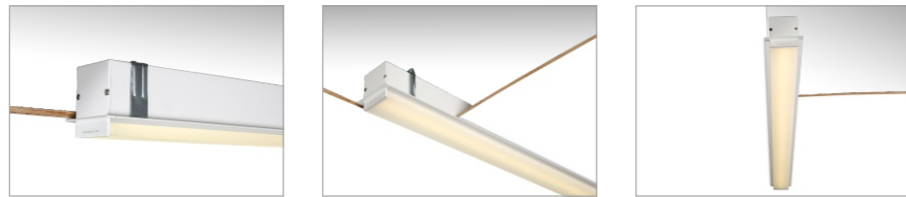


NIMBLE-M RECESSED LUMINAIRE 733B

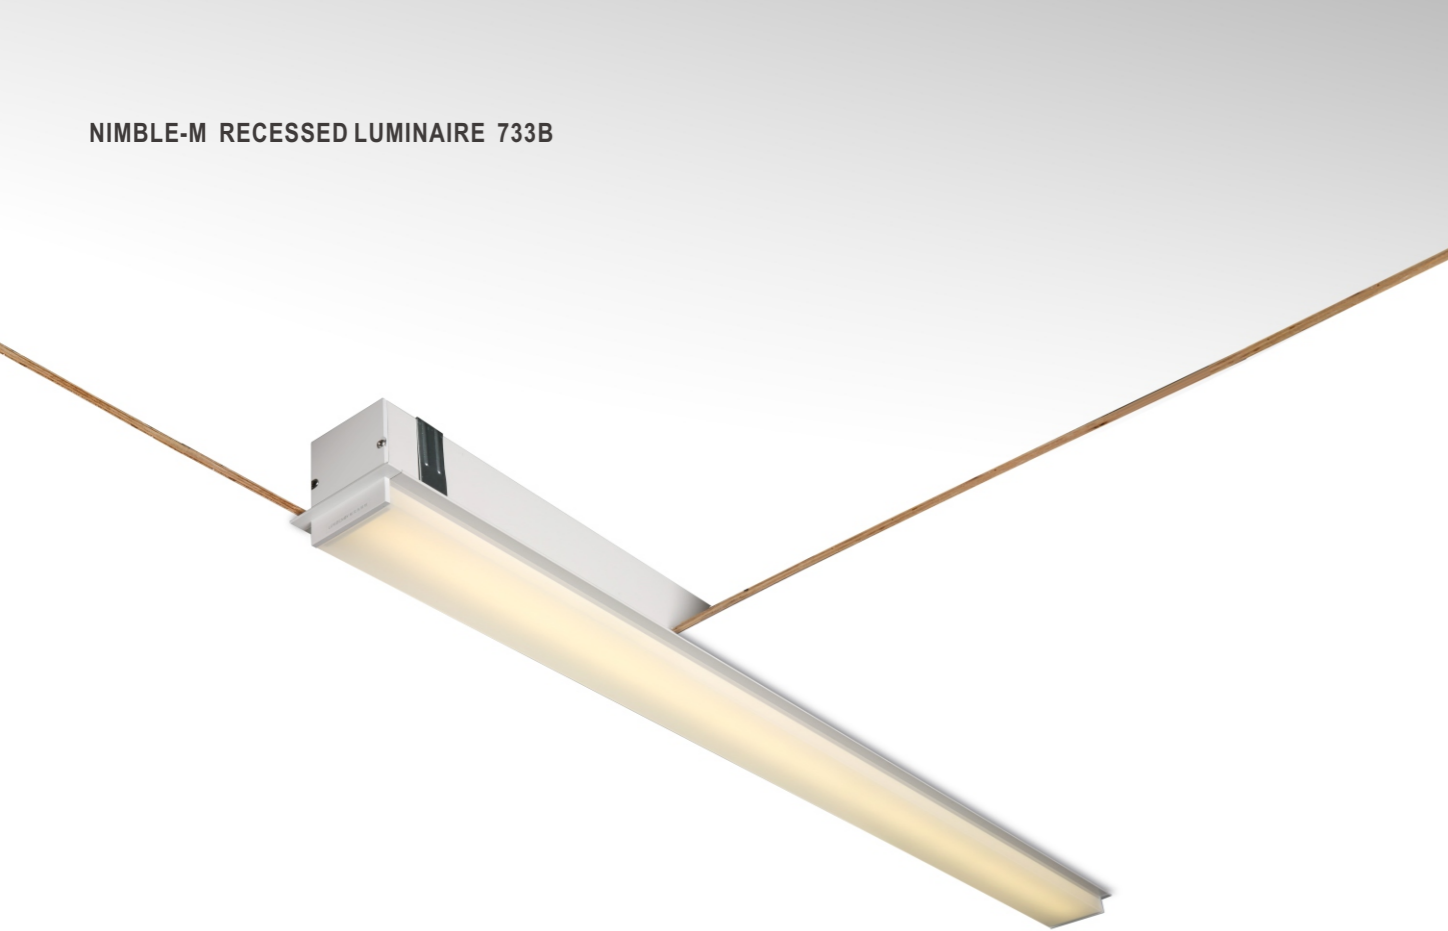

Nimble-M 尼博

733B 嵌入灯


Recessed luminaires technical data sheet

733B 尼博线形嵌入灯, 采用优质铝合金型材灯体, 压铸铝端盖, 外观尺寸比例科学, 线条硬朗美观, 结构合理, 安装维护方便灵活。“U”型高透光率扩散型PMMA散光罩根据LED光波长专门开发, 透光率高、出光均匀无阴影、防眩光效果好, 控光面罩与灯具外壳完美结合使整个灯具更加美观。先进的热管理技术, 散热优异, 确保了灯具最大光输出的持续性及色温的一致性。
应用场所: 写字楼, 学校、医院、高档超市、商场、酒店、公共建筑等。

733B Nimble series ceiling recessed Linear LED luminaires, housing made of high pressure extruded aluminum construction, die-cast aluminum end caps, light body, excellent heat dissipation, UV and Corrosion resistance. Slim Compact series with Germany imported high transmittance U-shape PMMA diffuser specially designed for LED light source creating smooth and uniform lighting distributions. Fixed direct distributions only. Advanced thermal management technology to ensure consistency of LED life span, color temperature and maximize output lumens.

Applications: Offices, Educational Institutes, Hospitals, Warehouses, Hospitality, Retails Etc.

产品细节 Details

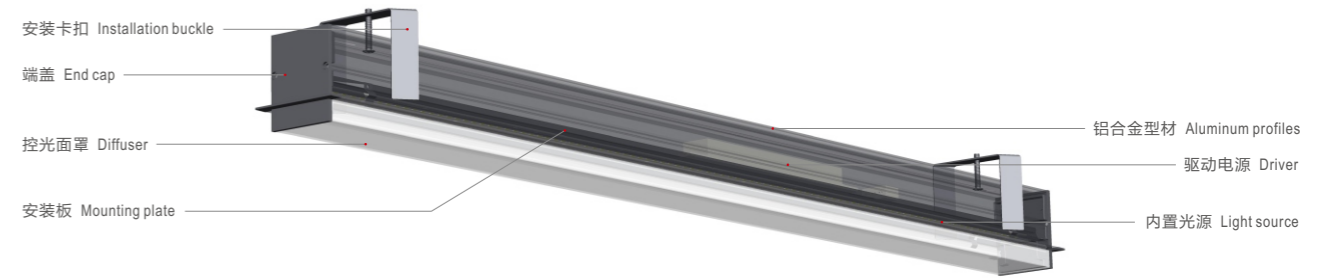




规格参数 Technical Data

名称: 733B 嵌入灯
 类型: 嵌入灯
 灯体材料: 优质铝合金
 表面处理: 静电喷涂
 控光面罩: PMMA
 光源: SMD
 整灯光效: 105 lm/W
 显色指数: ≥83
 色温: 3000K / 4000K / 6500K
 输入电压: 220-240V
 驱动电源: 高转换率驱动电源
 灯具寿命: 3万小时
 电气等级: I

Product name: 733B Recessed luminaire
Type: Recessed luminaires
Housing material: High-quality Aluminum alloy
Surface finish: Electrostatic thermo-painting
Diffuser material: PMMA
Light source: SMD
Luminaire efficiency: 105 lm /W
CRI: ≥83
Color temperature: 3000K / 4000K / 6500K
Input voltage: 220-240V
Driver: High efficiency driver
Lifespan: 30000h
Electrical grade: I

Indoor 室内适用	General lighting 基础照明	High efficiency 高光效	Long life 长寿命	Anti glare 防眩光	Accurate light distribution 准配光
No flickering 无频闪	IP 20 Protection level 防护等级	Protective grounding 保护接地	Fire protection 防火	Low lumen depreciation 低光衰	color-temp changing 调色温驱动电源
Microwave sensor 微波感应控制	Emergency kits 应急照明组件	DALI	light control 光控	Wifi or Ble, Zigbee	1-10V 1-10V dimming 1-10V调光
China Compulsory Certification 3C认证	CE certification CE认证	CB certification CB认证			




标准灯具 Standard single fitting

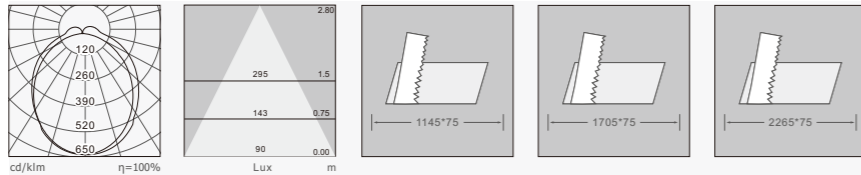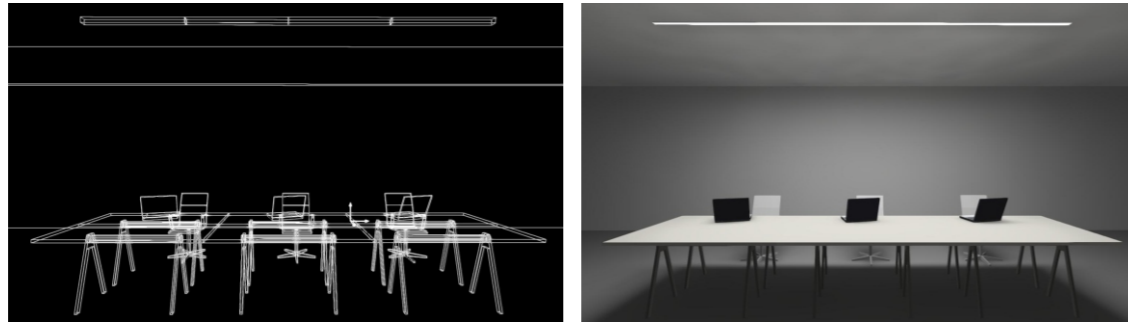

低功率 (HE)

CCT: 3000K
Colors: White


Item No	Power Flux	L*W*H
733B-RM1160T18W	18W / 1890 lm	1160*90*85
733B-RM1720T27W	27W / 2835 lm	1720*90*85
733B-RM2280T36W	36W / 3780 lm	2280*90*85

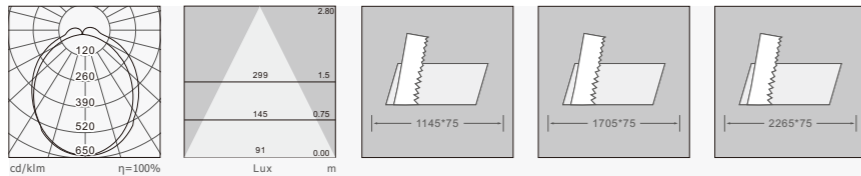

低功率 (HE)

CCT: 4000K
Colors: White





Item No	Power Flux	L*W*H
733B-RM1160T18W	18W / 1910 lm	1160*90*85
733B-RM1720T27W	27W / 2855 lm	1720*90*85
733B-RM2280T36W	36W / 3800 lm	2280*90*85

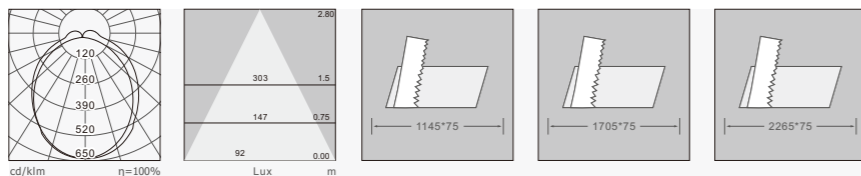

低功率 (HE)

CCT: 6500K
Colors: White


Item No	Power Flux	L*W*H
733B-RM1160T18W	18W / 1930 lm	1160*90*85
733B-RM1720T27W	27W / 2875 lm	1720*90*85
733B-RM2280T36W	36W / 3820 lm	2280*90*85

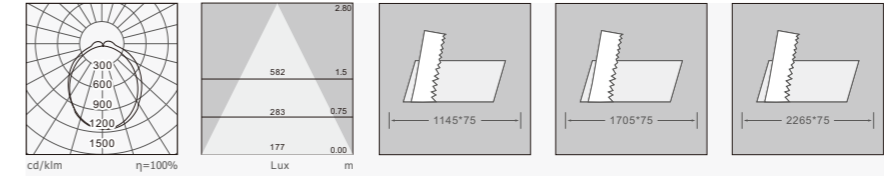

小功率 (HO-L)

CCT: 3000K
Colors: White


Item No	Power Flux	L*W*H
733B-RM1160T36W	36W / 3780 lm	1160*90*85
733B-RM1720T54W	54W / 5670 lm	1720*90*85
733B-RM2280T72W	72W / 7560 lm	2280*90*85

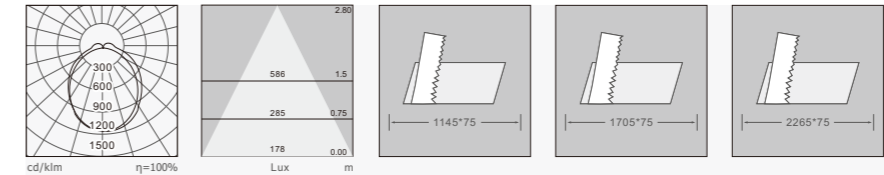

小功率 (HO-L)

CCT: 4000K
Colors: White

Item No	Power Flux	L*W*H
733B-RM1160T36W	36W / 3800 lm	1160*90*85
733B-RM1720T54W	54W / 5690 lm	1720*90*85
733B-RM2280T72W	72W / 7580 lm	2280*90*85

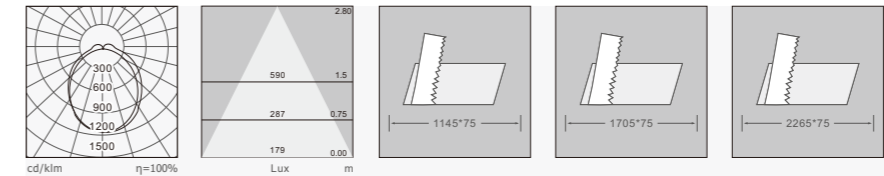

小功率 (HO-L)


CCT: 6500K
Colors: White

Item No	Power Flux	L*W*H
733B-RM1160T36W	36W / 3820 lm	1160*90*85
733B-RM1720T54W	54W / 5710 lm	1720*90*85
733B-RM2280T72W	72W / 7600 lm	2280*90*85

应用参考 Application reference

Open space: 10m x 10m x 3m; reflectance (%) : ceiling80/wall50/floor20/ floor ceiling walls; illuminance is the average lux level on 0.75m working surface; "H" is the fittings installation height


开放式空间：10m x 10m x 3m；反射率(%)：天花板 80/墙壁50/地板20；照度为 0.75m工作面平均照度；H为灯具安装离地高度。

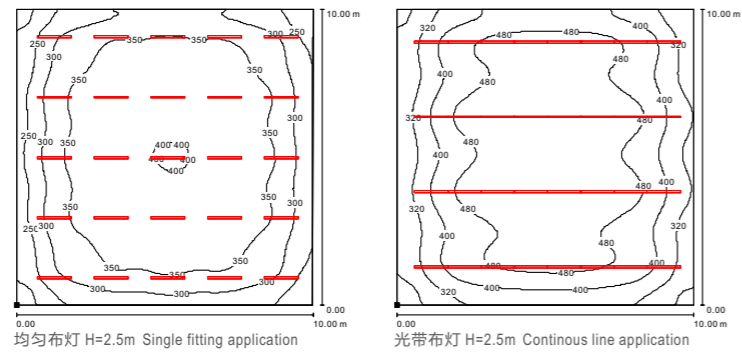

Item No	Power Flux	Number	W/m ²	H=2.8m Illuminance(Lux)
733B-RM1160T18W	18W / 1890 lm	25	4.5	335
733B-RM9000T144W	144W / 13680 lm	4	5.76	435



关联产品 Related products

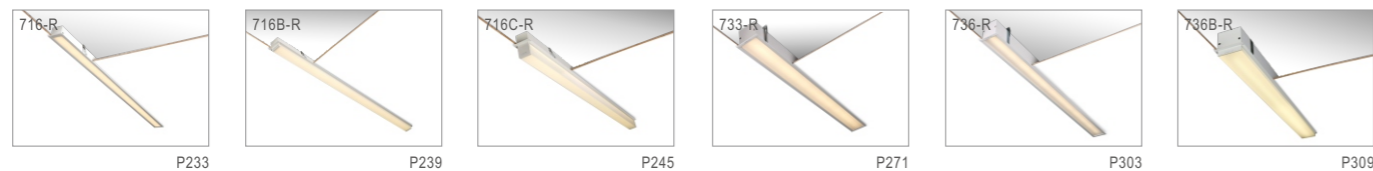

Nimble-M 尼博系列 733B嵌入灯办公场所实景图