

NIMBLE-L CEILING SURFACE MOUNTED 735B



Nimble-L 尼博

735B 吸顶灯

Ceiling surface mounted luminaires technical data sheet


735B 尼博线形吸顶灯为简约式LED灯具，采用优质铝合金型材灯体，无螺丝压铸铝端盖，灯具线条硬朗美观、外观尺寸比例科学，结构合理，安装维护方便灵活。“U”型PMMA高透光率扩散型亚克力散光罩根据LED光波长开发，出光均匀无阴影、防眩光效果好，控光面罩与灯体完美结合使整个灯具更加美观。先进的热管理技术，散热优异，确保了灯具最大光输出的持续性及色温的一致性。此系列可做无边嵌入式安装。

应用场所：写字楼、学校、医院、高档超市、酒店、商场、公共建筑等。

735B Nimble series Ceiling surface mounted Linear LED luminaire, housing made of high pressure extruded aluminum construction, die-cast aluminum end caps with no visible screws, simple and easy installation, excellent heat dissipation. Slim Compact series with Germany imported high transmittance U-shape PMMA diffuser specially designed for LED light source creating smooth and uniform lighting distributions, without visible dark spot or light gaps in seamless continuous lighting system. Advanced thermal management technology to ensure consistency of LED life span, color temperature and maximize output lumens. Trimless recessed mounted is also available for this series.

Applications: Office, Educational Institutes, Hospitals, Warehouses, Hospitality, Retailers Etc.

产品细节 Details

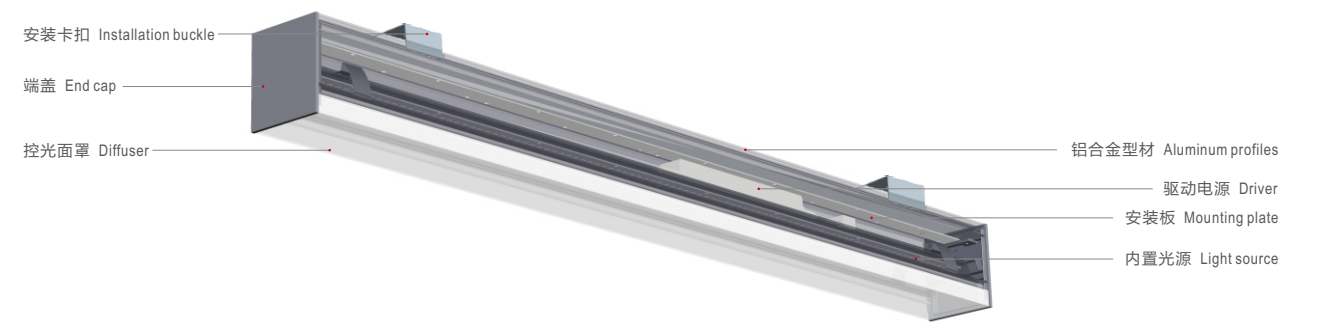



规格参数 Technical Data

名称: 735B 吸顶灯
类型: 吸顶灯
灯体材料: 优质铝合金
表面处理: 静电喷涂
控光面罩: PMMA
光源: SMD
整灯光效: 105 lm/W
显色指数: ≥83
色温: 3000K/4000K/6500K
输入电压: 220-240V
驱动电源: 高转换率驱动电源
灯具寿命: 3万小时
电气等级: I

Product name: 735B Ceiling surface mounted luminaire
Type: Ceiling surface mounted
Housing material: High-quality Aluminum alloy
Surface finish: Electrostatic thermo-painting
Diffuser material: PMMA
Light source: SMD
Luminaire efficiency: 105 lm/W
CRI: ≥83
Color temperature: 3000K / 4000K / 6500K
Input voltage: 220-240V
Driver: High efficiency driver
Lifespan: 30000h
Electrical grade: I




标准灯具 Standard single fitting

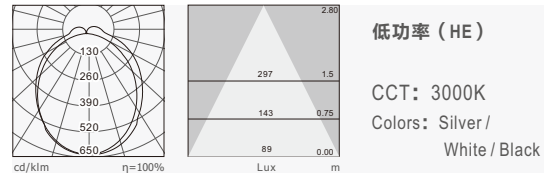




低功率 (HE)
CCT: 3000K
Colors: Silver /
White / Black

Item No	Power Flux	L*W*H
735B-CS1143T18W	18W / 1890 lm	1143*94/105
735B-CS1703T27W	27W / 2835 lm	1703*94/105
735B-CS2263T36W	36W / 3780 lm	2263*94/105






低功率 (HE)
CCT: 4000K
Colors: Silver /
White / Black

Item No	Power Flux	L*W*H
735B-CS1143T18W	18W / 1910 lm	1143*94/105
735B-CS1703T27W	27W / 2855 lm	1703*94/105
735B-CS2263T36W	36W / 3800 lm	2263*94/105

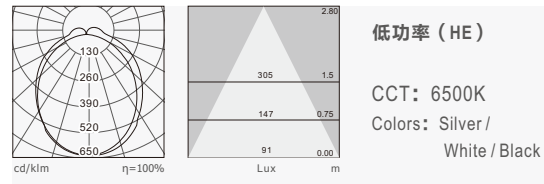





低功率 (HE)
CCT: 6500K
Colors: Silver /
White / Black

Item No	Power Flux	L*W*H
735B-CS1143T18W	18W / 1930 lm	1143*94/105
735B-CS1703T27W	27W / 2875 lm	1703*94/105
735B-CS2263T36W	36W / 3820 lm	2263*94/105





小功率 (HO-L)
CCT: 3000K
Colors: Silver /
White / Black

Item No	Power Flux	L*W*H
735B-CS1143T36W	36W / 3780 lm	1143*94*105
735B-CS1703T54W	54W / 5670 lm	1703*94*105
735B-CS2263T72W	72W / 7560 lm	2263*94*105



小功率 (HO-L)
CCT: 4000K
Colors: Silver /
White / Black

Item No	Power Flux	L*W*H
735B-CS1143T36W	36W / 3820 lm	1143*94*105
735B-CS1703T54W	54W / 5710 lm	1703*94*105
735B-CS2263T72W	72W / 7600 lm	2263*94*105





小功率 (HO-L)
CCT: 6500K
Colors: Silver /
White / Black

Item No	Power Flux	L*W*H
735B-CS1143T36W	36W / 3820 lm	1143*94*105
735B-CS1703T54W	54W / 5710 lm	1703*94*105
735B-CS2263T72W	72W / 7600 lm	2263*94*105

应用参考 Application reference

Open space: 10m x 10m x 3m; reflectance (%): ceiling80/wall50/floor20/ floor ceiling walls; illuminance is the average lux level on 0.75m working surface; "H" is the fittings installation height

开放式空间: 10m x 10m x 3m; 反射率(%): 天花板 80/墙壁50/地板20; 照度为 0.75m工作面平均照度; H为灯具安装离地高度。

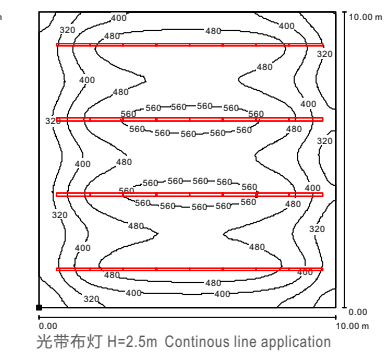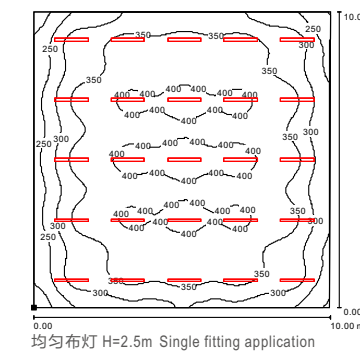

Item No	Power Flux	Number	W/m ²	H=2.8m Illuminance(Lux)
735B-CS1143T18W	18W / 1890 lm	30	5.4	338
735B-CS9600T144W	144W / 15120 lm	4	5.76	446