

OXEYE TRACK/CEILING MOUNTED SPOT LIGHT 532



Oxeye 天眼

532 导轨/吸顶射灯

Track/Ceiling Mounted spot light technical data sheet

532 导轨/吸顶射灯，采用优质铝合金结构，静电喷涂处理，防尘耐用不易刮花，照射角度可灵活调节，专业设计的反射器是根据LED光波长研发，优化了其光学性能并实现了最高的灯具照明效率，有12° /24° /38° 三种光束角，先进的热管理技术，散热优异，确保了灯具最大光输出的持续性及色温的一致性。此灯有导轨和吸顶两种安装方式。

应用场所：商场、专卖店、酒店、展览展示等场所。

532 track/ceiling mounted spot light with high quality extruded aluminum alloy in durable corrosion resistance, anti-fading and anti-scratch electrostatic thermo-painting finish. Professionally reflector designed according to different LED wave length well optimized the optimized the optical property and at the same time achieved the maximum lighting efficiency, 12° / 24° / 38° three beam angles available. Advance thermal management technology to ensure consistency of LED life span, color temperature and maximize output lumens. There are both track and ceiling mounted installed way for this fixture.

Applications: Shopping malls, specialty stores, hotels, exhibitions and other places.

产品细节 Details






规格参数 Technical Data

名称: 532 射灯
 类型: 导轨/吸顶射灯
 灯体材料: 优质铝合金
 表面处理: 静电喷涂
 光源: COB
 整灯光效: 100 lm/W
 显色指数: ≥80
 色温: 3000K/ 4000K/6500K
 输入电压: 220-240V
 驱动电源: 高转换率驱动电源
 灯具寿命: 3万小时
 电气等级: II


Product name: 532 Spot light
 Type: Track/Ceiling Spot light
 Housing material: High quality aluminum alloy
 Surface finish: Electrostatic thermo-painting
 Light source: COB
 Luminaire efficiency: 100 lm /W
 CRI: ≥80
 Color temperature: 3000K/ 4000K/6500K
 Input voltage: 220-240V
 Driver: High efficiency driver
 Lifespan: 30000h
 Electrical grade: II

Indoor 室内适用	General lighting 基础照明	High efficiency 高光效	Long life 长寿命	Anti glare 防眩光	Accurate light distribution 准配光
No flickering 无频闪	IP 20 Protection level 防护等级	Double insulated structure 双重绝缘结构	Fire protection 防火	Low lumen depreciation 低光衰	color-temp changing 调色温驱动电源
Microwave sensor 微波感应控制	Emergency kits 应急照明组件	DALI	light control 光控	Wifi or Ble, Zigbee	1-10V 1-10V dimming 1-10V调光
China Compulsory Certification 3C认证	CE certification CE认证	CB certification CB认证			


标准灯具 Standard single fitting

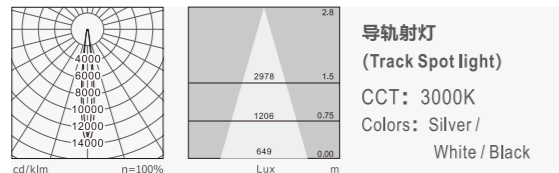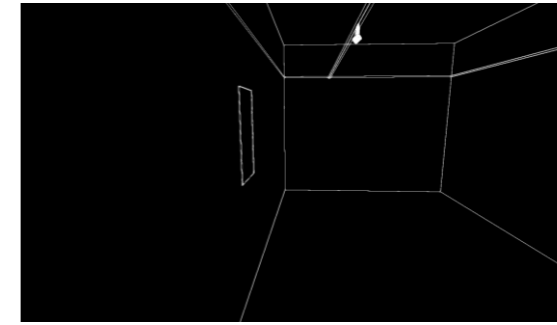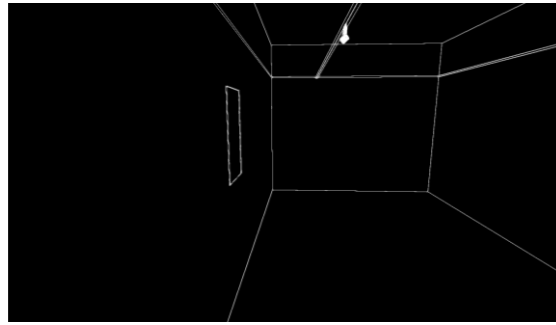


Item No	Power Flux	Beam angle	L*W*H
532-TS122T20W	20W / 2000 lm	12° / 24° / 36°	φ 116*174






Item No	Power Flux	Beam angle	L*W*H
532-TS122T20W	20W / 2020 lm	12° / 24° / 36°	φ 116*174

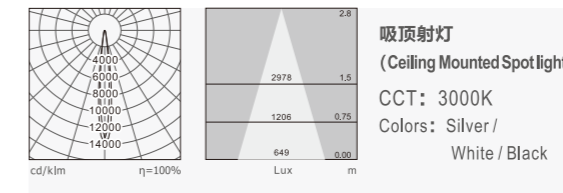


Item No	Power Flux	Beam angle	L*W*H
532-CS122T20W	20W / 2000 lm	12° / 24° / 36°	φ 116*174

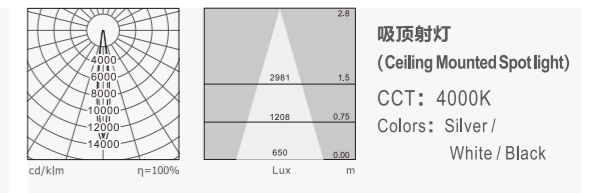


Item No	Power Flux	Beam angle	L*W*H
532-CS122T20W	20W / 2020 lm	12° / 24° / 36°	φ 116*174

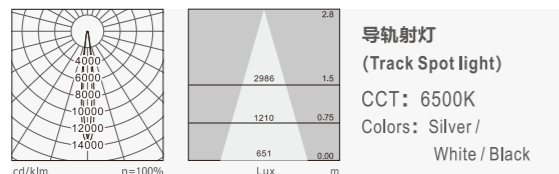

Item No	Power Flux	Beam angle	L*W*H
532-TS122T20W	20W / 2040 lm	12° / 24° / 36°	φ 116*174

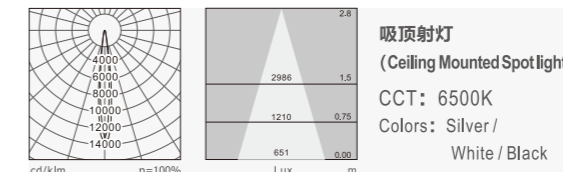

Item No	Power Flux	Beam angle	L*W*H
532-CS122T20W	20W / 2040 lm	12° / 24° / 36°	φ 116*174



关联产品 Related products



P345



←
Oxeye
天眼系列
532导轨射灯
公共场所实景图